INTIMIDATOR™ 12XP

12” Capacity Hand-Fed Chipper



The Model 12XP is the **largest of three** 12” capacity drum-style chippers offered and is often preferred by those looking for the **most productive solution** in a 12” chipper. The 12XP features many of the same features found on the 12XPC, but available with larger engine options up to 145 horsepower, optional hydraulic winch and features a larger axle and tires as standard.

FEED SYSTEM

A powerful dual feed wheel system generates abundant pulling power to pull and compress material into the chipper. To assist with down pressure, two adjustable side mounted spring can generate over 400 pounds of down pressure, reducing the need to trim or re-position material. For added down pressure a hydraulic lift cylinder is available as an option.



WIDE PROFILE INFEED

To simplify the feeding process, a wide profile 30 ¾” high x 54” wide infeed hopper with 30” fold down infeed pan is standard. The large infeed provides a robust platform for feeding multiple stems or brushy material at one time.

DURABLE DRUM

A durable 24” diameter x 18 3/4” wide four-knife drum is standard with the fabricated components backed by a 5-year “GUTS” warranty. This efficient drum turns at a slower RPM, providing increased torque for enhanced chipping capabilities. With four knives, there are more cuts per revolution increasing efficiency.



Bandit
EMPLOYEE-OWNED

6750 Millbrook Rd. • Remus, MI 49340 • **1-800-952-0178**

FIND US ONLINE **WWW.BANDITCHIPPERS.COM**

Hand-Fed Chippers • Stump Grinders • Whole Tree Chippers
Horizontal Grinders • Slow-Speed Shredders

All specifications, dimensions and options are subject to change without notice, and were current at the time of printing. Dimensions may vary, depending on options and engines selected. Bandit Industries, Inc. reserves the right to change designs, specifications and options without prior notice. © 2025 Bandit Industries, Inc. All Rights Reserved.

CALL YOUR LOCAL BANDIT SALES REPRESENTATIVE TO SCHEDULE A DEMONSTRATION TODAY!

SPECIFICATIONS

MEASUREMENTS	TOWABLE	
Length (tray open):	16’ 2”	492.8 cm
Width:	6’ 8”	203.2 cm
Height:	8’ 2”	248.9 cm
Weight:	5,500 - 6,500 lbs.	2,494.8 - 2,948.4 kg
Engines:	74 to 145 HP (gas and diesel)	
Fuel Tank:	25 gal.	94.6 L
Hydraulic Tank:	12 gal.	45.4 L

UNDERCARRIAGES

Towable: Single 7,000 pound Torflex axle with (2) 235/80R 16” tires mounted on white spoke rims

Track: Rubber track undercarriage

DIMENSIONS

Capacity:	12”	30.48 cm
Opening:	14 1/4” x 17” wide	36.2 cm x 43.2 cm wide
Drum:	24” dia. x 18.75” wide	61 cm dia. x 47.6 cm wide
RPM:	Approximately 1,530 RPM	

Hitch: 2-½” pintle hitch

Discharge: Height-adjustable, 360° hand crank swivel with 12” (30.5 cm) adjustable chip deflector


Feed System: Slide box feed system with (2) 17” (43.2 cm) adjustable down pressure springs, (2) 7-1/2” diameter x 17” wide feed wheels (19.05 cm x 43.18 cm) powered by (2) 15 CID hydraulic motors

Frame: Mainframe is constructed of ¼” x 2” x 4” tubing with a 3/8” x 3” x 6” tongue

Standard & Custom Colors Available

Choose from two standard colors, or select a custom color to match your fleet.

Bandit Yellow Green

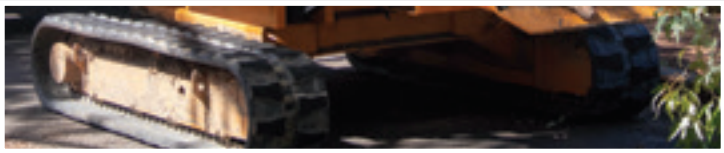

DISCHARGE

To assist with enhanced chipping throwing power, a slot called the “Power Slot” is located on the front side of the drum housing allowing for increased air flow or in the event of machine plugging significantly simplifying the unplugging process.



COMMITTED TO QUALITY & PRODUCTIVITY

Since 1983, Bandit has manufactured equipment for a multitude of wood waste processing markets. The vision since the beginning, is to build quality, highly productive, easy to maintain equipment providing years of dependable service.

The commitment for quality, innovation and dedication is instilled in every employee and is one of the main reasons why Bandit became an Employee-Owned Company (ESOP) in 2018. These core values ensure each Bandit machine will leave the factory ready to exceed your expectations.

INTIMIDATOR™ 12XP FEATURES

- **Rope/Line Shear Device (standard)**
  Provides an improved chance that rope or lines inadvertently entering the chipper may be cut
- **Last Chance Cables (standard)**
  Stops/reverses the feed wheel when pulled in case of an emergency
- **Operator Safety Control Bar (standard)**
  Wraps around 3 sides of the infeed chute & controls the direction of feed wheels
- **Wood Pusher Paddle (standard)**
  Used to feed small wood debris into the chipper
- **Chipper Hood Pin w/Padlock (standard)**
  Prevents unauthorized access to the disc or drum
- **Chipper Hood Engine Disable Plug (standard)**
  Prevents engine from being started without the hood pin in place
- **Hydraulic Bottom Bump Bar (option)**
  Stops feed wheels via mechanical connection when bumped, diverting hydraulic power away from the feed wheels

WATCH IT RUN!

Bandit Offers a Complete Line of Tree Care Equipment:
Hand-Fed Chippers • Stump Grinders • Whole Tree Chippers
Horizontal Grinders • Slow-Speed Shredders